


STANDARD LED LAMPS




飞扬电子
FLYING ELECTRONICS

Package	Part No. NFL-	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2 θ 1/2 (deg)	Drawing No.
		Material/Emitted Color	Peak Wave Length λ p (nm)		Δ λ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf(V)		Iv (mcd)		
									Typ	Max	Typ		
T-1 Standard 1.0" Lead φ 3	3014HD	GaP/GaP Red	700	Red diffused	90	40	15	50	2.25	2.60	3.0	60	L-003
	3014GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	15	60	
	3014ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	20	60	
	3014ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	20	60	
	3014YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	15	60	
	3014GT	GaP/GaP Green	568	Green trans	30	80	30	150	2.20	2.50	40	30	
	3014ET	GaAsP/GaP Orange	635	Red trans	35	80	30	150	2.10	2.50	50	30	
	3014ET-E	GaAsP/GaP Orange	635	Orange trans	35	80	30	150	2.10	2.50	50	30	
	3014YT	GaAsP/GaP Yellow	585	Yellow trans	35	80	30	150	2.10	2.50	40	30	
T-1 3/4 Standard 1.0" Lead φ 5	5012HD	GaP/GaP Red	700	Red diffused	90	40	15	50	2.25	2.60	4	80	L-004
	5012GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	14	80	
	5012ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	18	80	
	5012ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	18	80	
	5012YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	14	80	

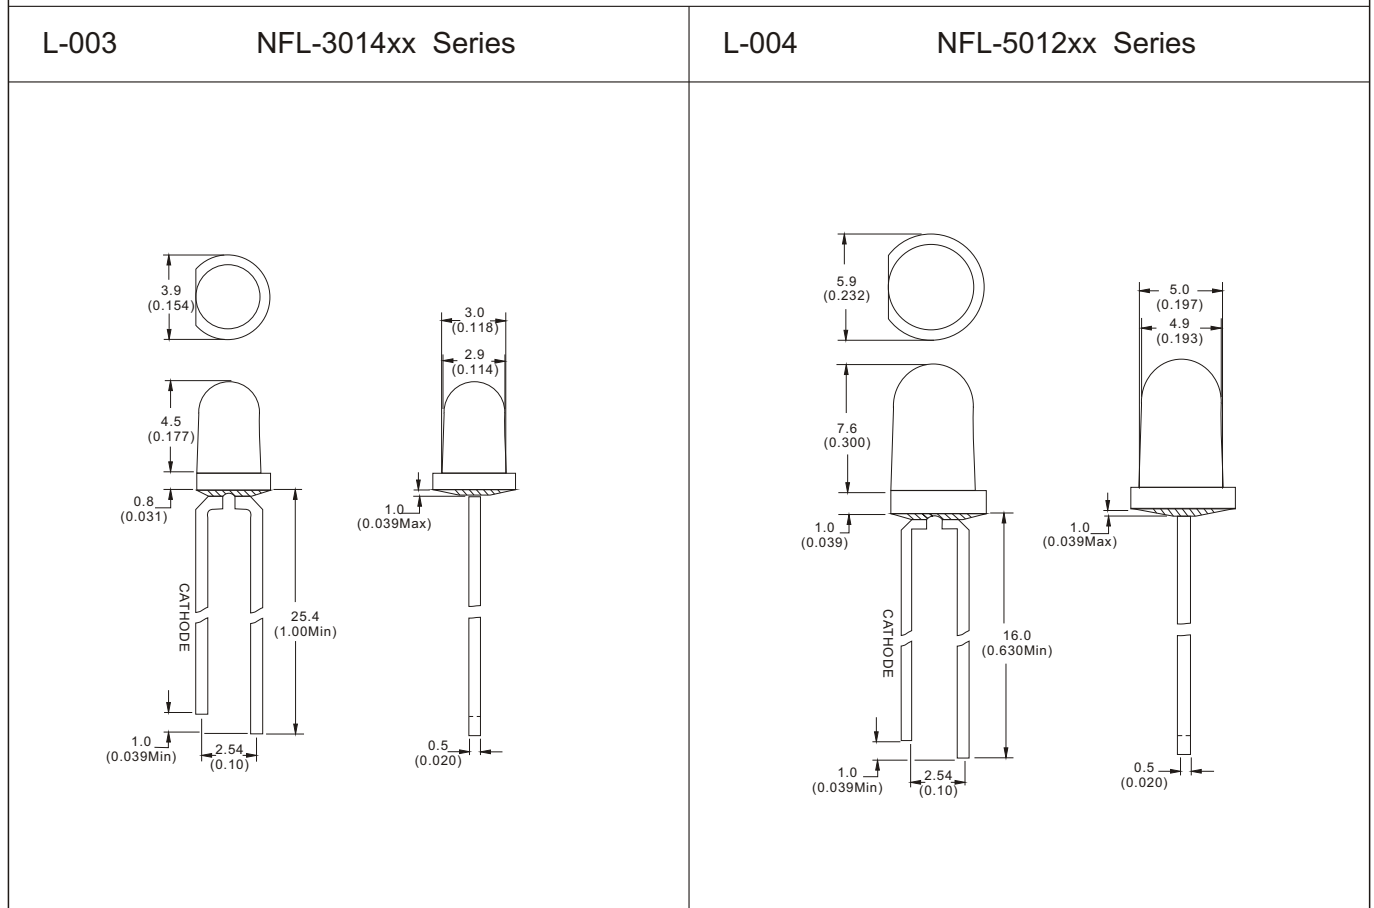



Package	Part No. NFL-	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2 θ 1/2 (deg)	Drawing No.
		Material/Emitted Color	Peak Wave Length λ p (nm)		Δ λ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf(V)		Iv (mcd)		
									Typ	Max	Typ		
T-1 3/4 Standard 1.0" Lead φ 5	5013HD	GaP/GaP Red	700	Red diffused	90	40	15	50	2.25	2.60	5	60	L-005
	5013GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	20	60	
	5013ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	30	60	
	5013ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	30	60	
	5013YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	20	60	
	5013GT	GaP/GaP Green	568	Green trans	30	80	30	150	2.20	2.50	50	30	
	5013ET	GaAsP/GaP Orange	635	Red trans	35	80	30	150	2.10	2.50	80	30	
	5013ET-E	GaAsP/GaP Orange	635	Orange trans	35	80	30	150	2.10	2.50	80	30	
	5013YT	GaAsP/GaP Yellow	585	Yellow trans	35	80	30	150	2.10	2.50	50	30	
Round 1.0" Lead φ 8	8003GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	30	60	L-006
	8003ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	40	60	
	8003ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	40	60	
	8003YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	30	60	
	8003GT	GaP/GaP Green	568	Green trans	30	80	30	150	2.20	2.50	60	40	
	8003ET	GaAsP/GaP Orange	635	Red trans	35	80	30	150	2.10	2.50	90	40	
	8003ET-E	GaAsP/GaP Orange	635	Orange trans	35	80	30	150	2.10	2.50	90	40	
	8003YT	GaAsP/GaP Yellow	585	Yellow trans	35	80	30	150	2.10	2.50	60	40	

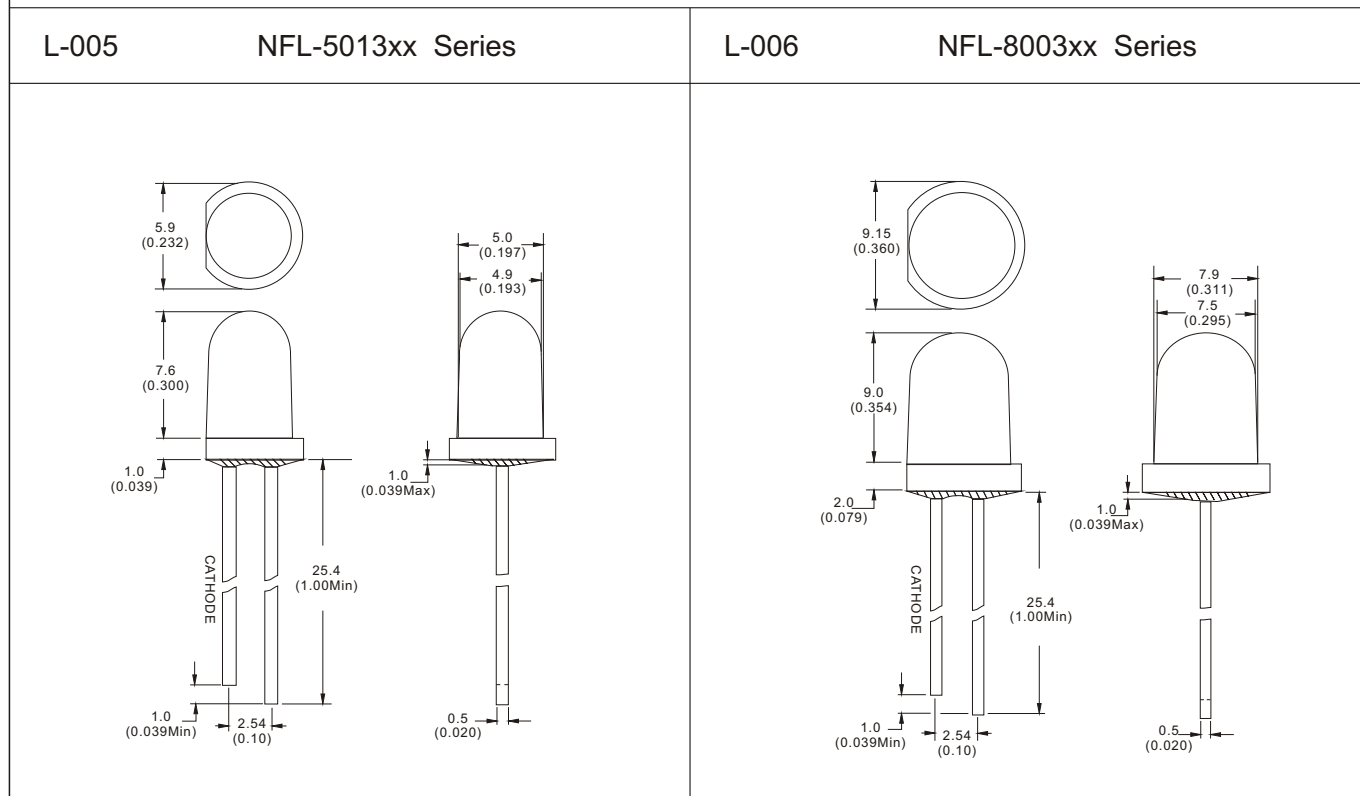



Package	Part No. NFL-	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2 θ 1/2 (deg)	Drawing No.
		Material/Emitted Color	Peak Wave Length λ p (nm)		Δ λ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf(V)		Iv (mcd)		
									Typ	Max	Typ		
Round 1.0" Lead φ 10	10003GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	30	60	L-007
	10003ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	40	60	
	10003ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	40	60	
	10003YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	30	60	
	10003GT	GaP/GaP Green	568	Green trans	30	80	30	150	2.20	2.50	60	40	
	10003ET	GaAsP/GaP Orange	635	Red trans	35	80	30	150	2.10	2.50	90	40	
	10003ET-E	GaAsP/GaP Orange	635	Orange trans	35	80	30	150	2.10	2.50	90	40	
10003YT	GaAsP/GaP Yellow	585	Yellow trans	35	80	30	150	2.10	2.50	60	40		
2.0*5.0* 7.0mm 1.0" Lead Rectangul ar	2513HD	GaP/GaP Red	700	Red diffused	90	40	15	50	2.25	2.60	2	120	L-008
	2513GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	8	120	
	2513ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	10	120	
	2513ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	10	120	
	2513YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	8	120	
2.0*5.0* 7.0mm 1.0" Lead Rectangul ar	2523HD	GaP/GaP Red	700	Red diffused	90	40	15	50	2.25	2.60	2	120	L-009
	2523GD	GaP/GaP Green	568	Green diffused	30	80	30	150	2.20	2.50	8	120	
	2523ED	GaAsP/GaP Orange	635	Red diffused	35	80	30	150	2.10	2.50	10	120	
	2523ED-E	GaAsP/GaP Orange	635	Orange diffused	35	80	30	150	2.10	2.50	10	120	
	2523YD	GaAsP/GaP Yellow	585	Yellow diffused	35	80	30	150	2.10	2.50	8	120	

