



32.00mm X 32.00mm Single Color Light Bar

Features:

- *High segment intensity
- *Wide viewing angle
- *Range of colours
- *White face White segment
- *Rohs compliant

Available option:

- *Alternative face colour
- *Cropped terminal pins
- *Available emitting colour
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number	Emitting Colors	Peak Wavelength	Forward Voltage Vf		Luminous Intensity Iv	
			Typical	Max.	Min.	Typical
NFA-S32ZH-01	GaP/GaP Red	700	2.25	2.50	6.40	12.80
NFA-S32ZS-01	GaAlAs/GaAs SH Hi-Red	660	1.80	2.20	128.00	192.00
NFA-S32ZD-01	GaAlAs/GaAs DH Super Red	660	1.80	2.20	352.00	448.00
NFA-S32ZE-01	GaAsP/GaP Orange	632	2.10	2.50	128.00	192.00
NFA-S32ZY-01	GaAsP/GaP Yellow	585	2.10	2.50	64.00	112.00
NFA-S32ZG-01	GaP/GaP Green	570	2.20	2.50	112.00	176.00
Units		nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Condition	Symbol	Red	Hi-Red	Super Red	Orange	Yellow	Green	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	50*16	100*16	100*16	100*16	100*16	100*16	mA
DC Forward Current Per Seg.		I _F	15*16	25*16	25*16	30*16	30*16	30*16	mA
Reverse Current Per Seg.	V _r =5V	I _R	10	10	10	10	10	10	μA
Power Dissipature		P _D	40*16	60*16	60*16	80*16	80*16	80*16	mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked

Chen N.H.

Approved

Jason Chen

Date


2006/09/05

PAGE 1 / 2




32.00mm X 32.00mm Single Color Light Bar

PACKAGE DIMENSION

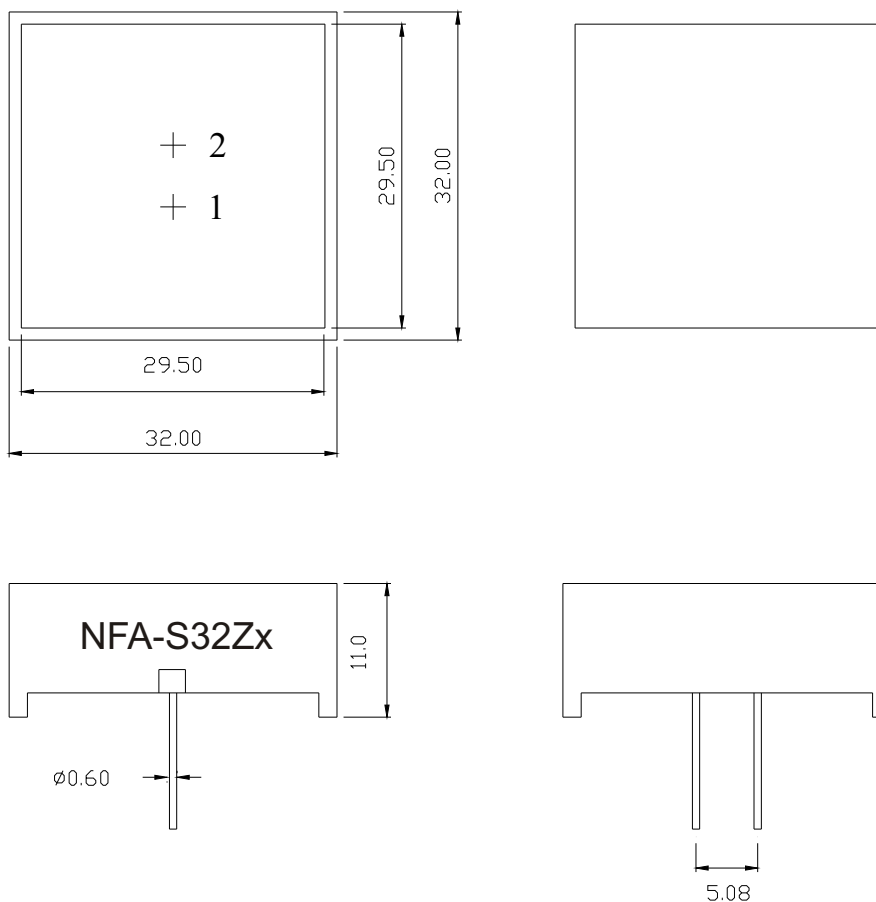

INTERNAL CIRCUIT DIAGRAM

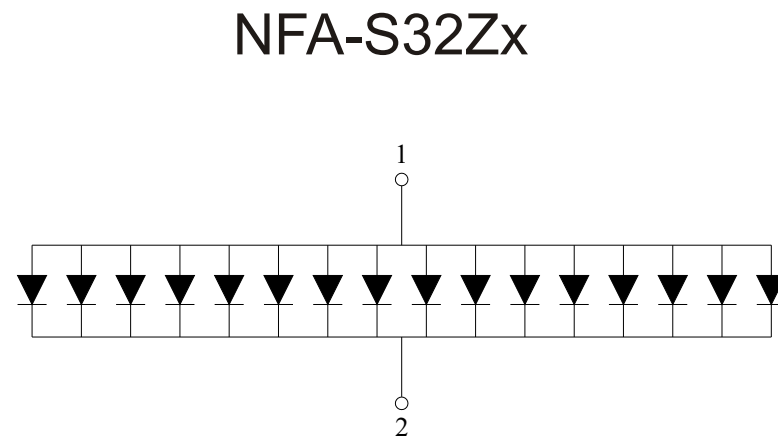

Tolerance $\pm 0.25\text{mm}$ unless stated

Checked

Chen N.H.

Approved

Jason Chen

Date

2006/09/05

PAGE 2 /2